


NOTES:

1. USE RESILIENT WEDGE GATE VALVES ON WATER MAINS UNDER 12" IN DIAMETER
2. MATERIAL TO BE DUCTILE IRON
3. WATER VALVES GREATER THAN 6' IN DEPTH REQUIRE A 1" SHAFT EXTENSION WITH 2" TOP NUT, CENTERING RING AND BOTTOM SET SCREW OR PIN

5.0' MIN. COVER
6.0' MAX. COVER

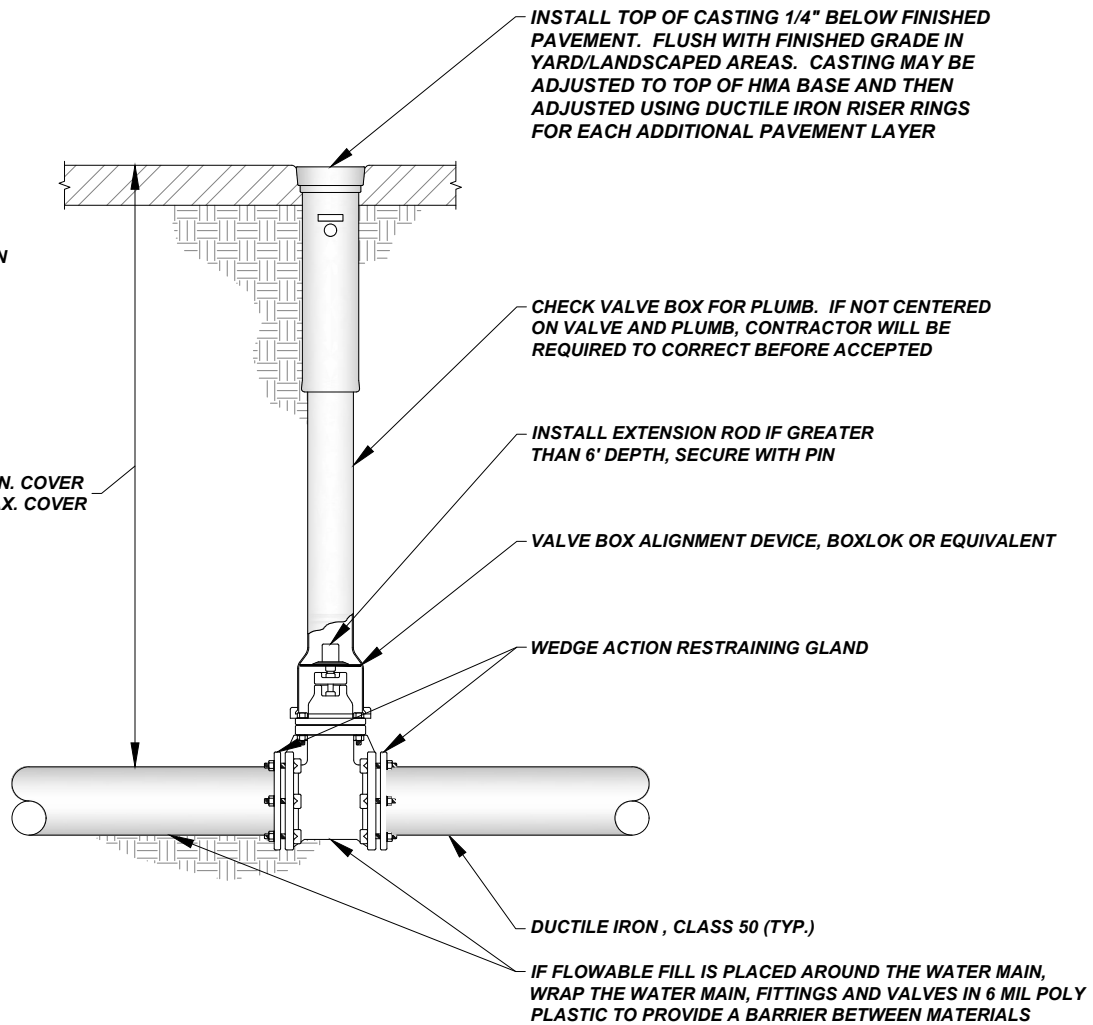

RESILIENT WEDGE GATE VALVE

NOT TO SCALE